




MAIN TECHNICAL PARAMETER:

- Display: 4 numbers+ 5 '*' +9 symbols
- Operating Voltage: 3.0V
- Drive Mode: 1/3BIAS, 1/4DUTY
- View Angle: 6:00
- Display Type: TN
- Display Mode: Transflective, Positive
- Connection: Metal Pin
- Operating Temperature: -20 ~ +70°C
- Storage Temperature: -30 ~ +85°C

EXTERNAL DIMENSION:

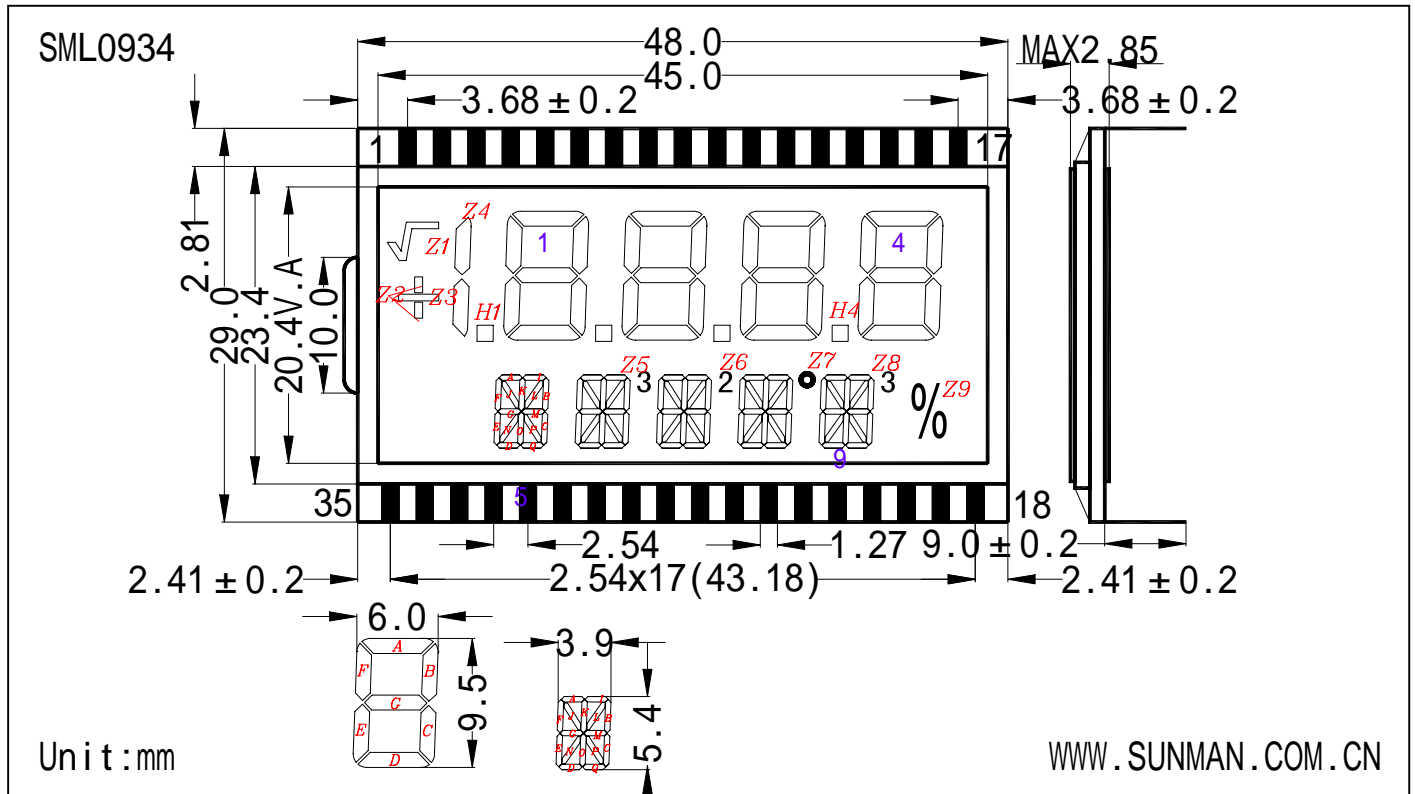

PIN CONFIGURATION:

PIN	1	2	3	4	5	6	7	8	9	10
COM1				COM1	Z1	1F	1A	2F	2A	3F
COM2			COM2		Z2	1G	1B	2G	2B	3G
COM3		COM3			Z3	1E	1C	2E	2C	3E
COM4	COM4				Z4	1D	H1	2D	H2	3D
PIN	11	12	13	14	15	16	17	18	19	20
COM1	3A	4F	4A	Z8		B9	I9	A9	F9	B8
COM2	3B	4G	4B	Z7		L9	K9	J9	G9	L8
COM3	3C	4E	4C	Z6		M9	O9	N9	E9	M8
COM4	H3	4D	H4	Z5	Z9	C9	P9	Q9	D9	C8
PIN	21	22	23	24	25	26	27	28	29	30



COM1	I8	A8	F8	B7	I7	A7	F7	B6	I6	A6
COM2	K8	J8	G8	L7	K7	J7	G7	L6	K6	J6
COM3	O8	N8	E8	M7	O7	N7	E7	M6	O6	N6
COM4	P8	Q8	D8	C7	P7	Q7	D7	C6	P6	Q6
PIN	31	32	33	34	35					
COM1	F6	B5	I5	A5	F5					
COM2	G6	L5	K5	J5	G5					
COM3	E6	M5	O5	N5	E5					
COM4	D6	C5	P5	Q5	D5					

REFERENCE WEBPAGE: <http://www.sunman.com.cn/lcd/product/SML0934.html>