




MAIN TECHNICAL PARAMETER:

- Display: 4 numbers+ 5 '*' +9 symbols
- Operating Voltage: 3.0V
- Drive Mode: 1/3BIAS, 1/4DUTY
- View Angle: 6:00
- Display Type: TN
- Display Mode: Transflective, Positive
- Connection: Metal Pin
- Operating Temperature: -20 ~ +70°C
- Storage Temperature: -30 ~ +85°C

EXTERNAL DIMENSION:

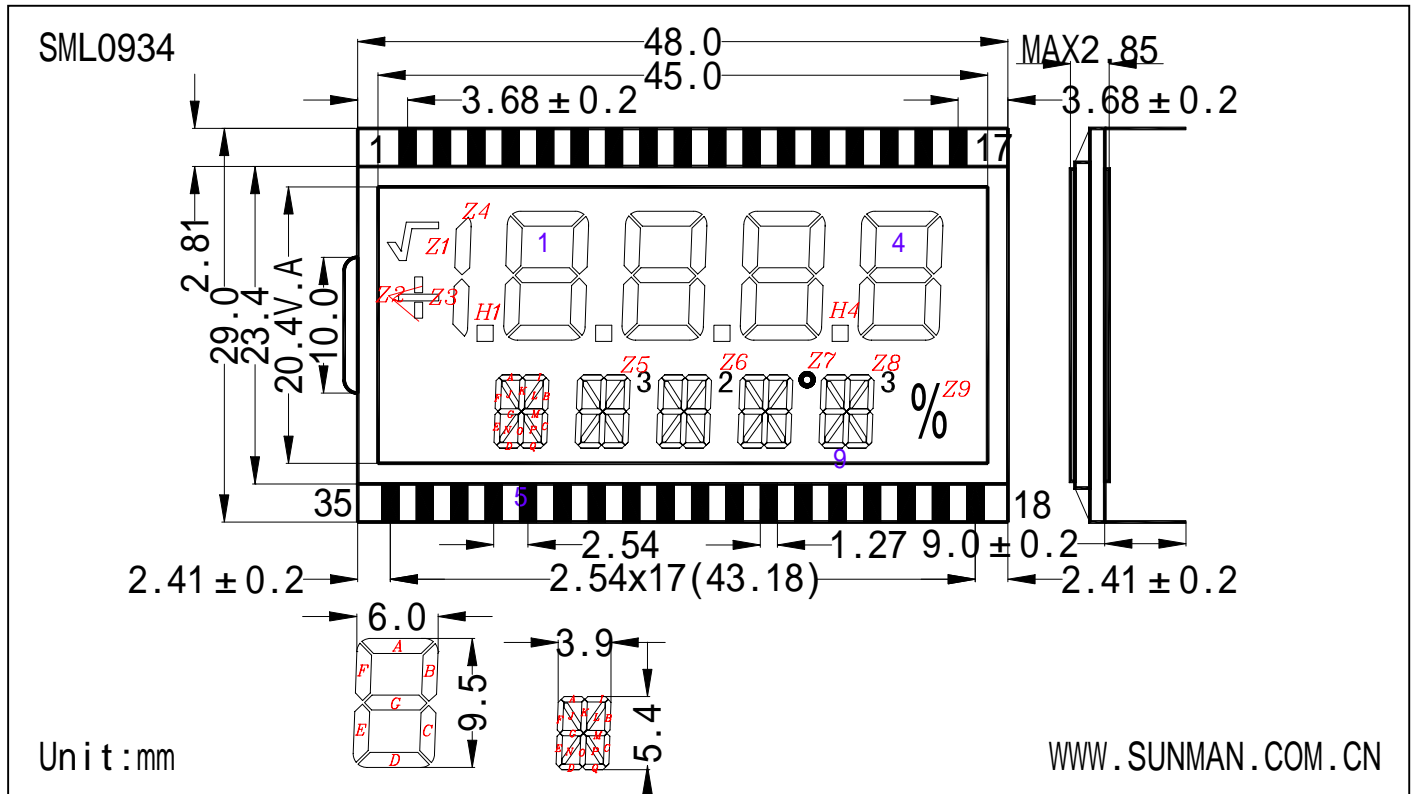

PIN CONFIGURATION:

| | | | | | | | | | | |
|------|------|------|------|------|----|----|----|----|----|----|
| PIN | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| COM1 | | | | COM1 | Z1 | 1F | 1A | 2F | 2A | 3F |
| COM2 | | | COM2 | | Z2 | 1G | 1B | 2G | 2B | 3G |
| COM3 | | COM3 | | | Z3 | 1E | 1C | 2E | 2C | 3E |
| COM4 | COM4 | | | | Z4 | 1D | H1 | 2D | H2 | 3D |
| PIN | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
| COM1 | 3A | 4F | 4A | Z8 | | B9 | I9 | A9 | F9 | B8 |
| COM2 | 3B | 4G | 4B | Z7 | | L9 | K9 | J9 | G9 | L8 |
| COM3 | 3C | 4E | 4C | Z6 | | M9 | O9 | N9 | E9 | M8 |
| COM4 | H3 | 4D | H4 | Z5 | Z9 | C9 | P9 | Q9 | D9 | C8 |
| PIN | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 |



| | | | | | | | | | | |
|------|----|----|----|----|----|----|----|----|----|----|
| COM1 | I8 | A8 | F8 | B7 | I7 | A7 | F7 | B6 | I6 | A6 |
| COM2 | K8 | J8 | G8 | L7 | K7 | J7 | G7 | L6 | K6 | J6 |
| COM3 | O8 | N8 | E8 | M7 | O7 | N7 | E7 | M6 | O6 | N6 |
| COM4 | P8 | Q8 | D8 | C7 | P7 | Q7 | D7 | C6 | P6 | Q6 |
| PIN | 31 | 32 | 33 | 34 | 35 | | | | | |
| COM1 | F6 | B5 | I5 | A5 | F5 | | | | | |
| COM2 | G6 | L5 | K5 | J5 | G5 | | | | | |
| COM3 | E6 | M5 | O5 | N5 | E5 | | | | | |
| COM4 | D6 | C5 | P5 | Q5 | D5 | | | | | |

REFERENCE WEBPAGE: <http://www.sunman.com.cn/lcd/product/SML0934.html>