




MAIN TECHNICAL PARAMETER:

- Display: 3 numbers+ 3 points +4 symbols
- Operating Voltage: 4.5V
- Drive Mode: Static
- View Angle: 6:00
- Display Type: TN
- Display Mode: Reflective, Positive
- Connection: Metal Pin
- Operating Temperature: -10 ~ +50°C
- Storage Temperature: -20 ~ +60°C

EXTERNAL DIMENSION:

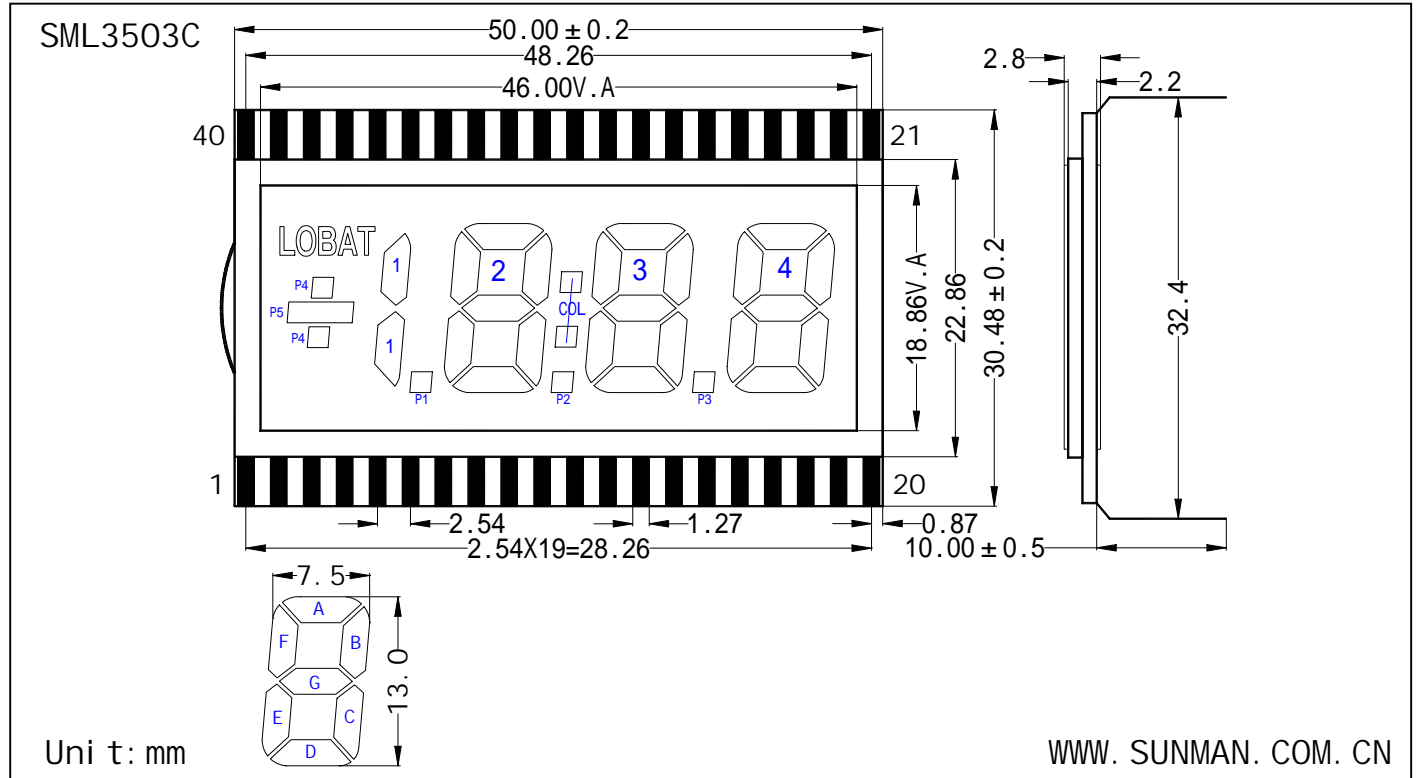

PIN CONFIGURATION:

PIN	1	2	3	4	5	6	7	8	9	10
COM	COM	P5	1BC					P1	2E	2D
PIN	11	12	13	14	15	16	17	18	19	20
COM	2C	P2	3E	3D	3C	P3	4E	4D	4C	4B
PIN	21	22	23	24	25	26	27	28	29	30
COM	4A	4F	4G	3B	3A	3F	3G	COL	2B	2A
PIN	31	32	33	34	35	36	37	38	39	40
COM	2F	2G						LOBAT	P4	COM

REFERENCE WEBPAGE: <http://www.sunman.com.cn/lcd/product/SML3503C.html>